




<div>FEATURES</div> <ul style="list-style-type: none"><li>Constant volume factory set for 2 stage.</li><li>Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.</li><li>Access door for motor, blower, and blower drives.</li><li>Adjustable motor sheave.</li><li>Motor with automatic internal thermal protection.</li></ul>	HORIZONTAL DISCHARGE CENTRIFUGAL POWER EXHAUST FOR SUN CHOICE UNITS				ProVent P/N		Wt.	
					CONSTANT VOLUME 2 STAGE	MODULATING		
	15-20 TON				PEHCSAV152025CS 208/230V 3Ph	PEHCSAV152025MS 208/230V 3Ph	360 Lbs.	
	VOLTAGE	ProVent P/N	External Static (in. W.G)	FLA	Hp	PEHCSAV152046CS 460V 3Ph		PEHCSAV152046MS 460V 3Ph
	230V/3Ph	PEHCSAV152025CS PEHCSAV152025MS	.1	11.2	4 Hp Total (Qty. 2, 2 Hp)			
	460V/3Ph	PEHCSAV152046CS PEHCSAV152046MS	8,000 cfm	5.6				
								

PLEASE NOTE:

- Return air duct, dampers, return air grills are specific for each unit.
- For proper electrical wire sizing, Provent power exhaust full load amps aneed to be added to equation.

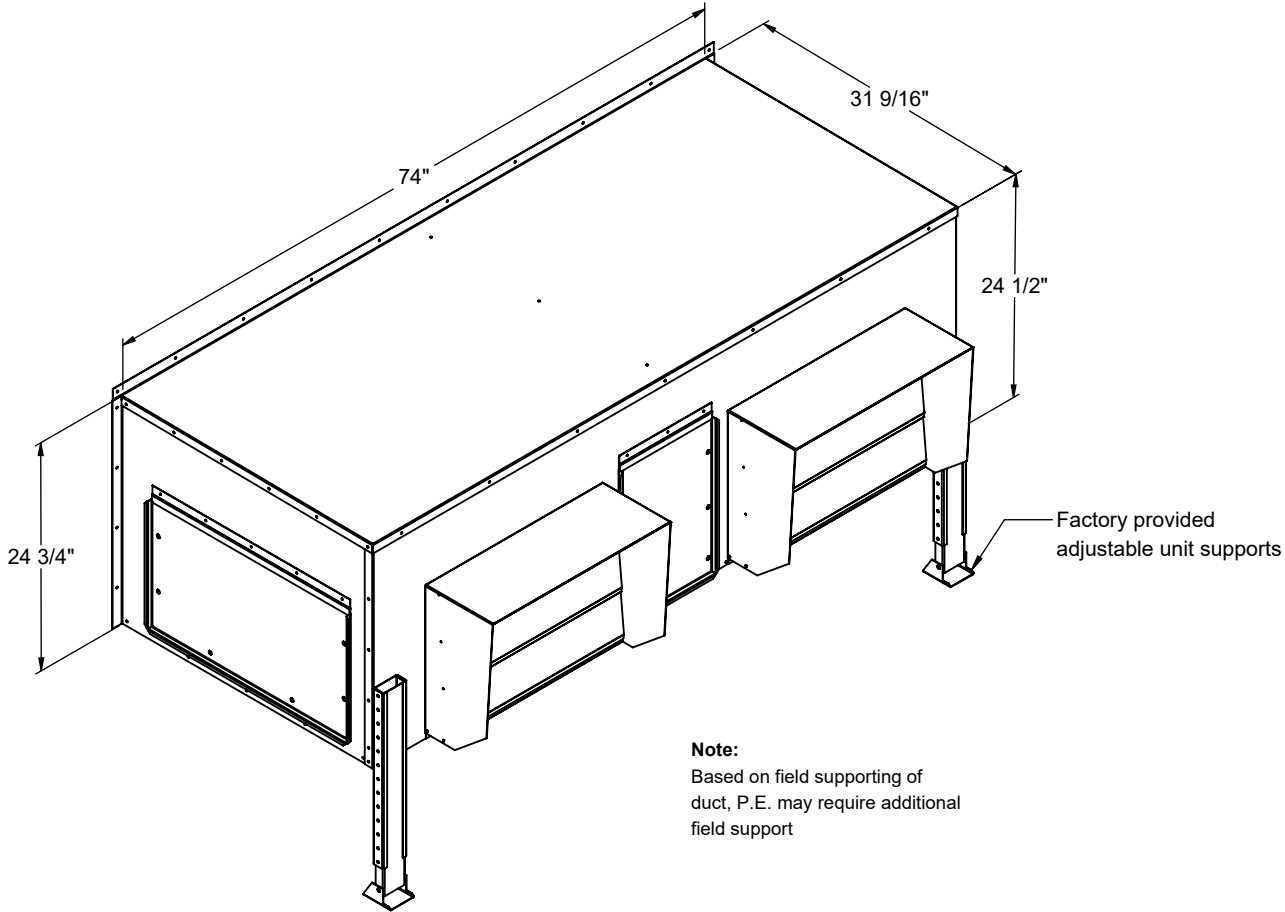

	<b>3847 WABASH DRIVE</b> <b>MIRA LOMA, CA 91725</b>  <b>PHONE (951) 685-1101</b> <b>FAX (619) 872-9799</b>	<b>SUBMITTED TO:</b> _____ <b>COMPANY:</b> _____ <b>JOB NAME:</b> _____ <b>EQUIPMENT:</b> _____ <b>NOTES:</b> _____	<b>FORM NO:</b> -	<b>PART NUMBER:</b> PEHCSAV1520 SERIES	
			<b>DATE:</b> 3/30/2023	<b>REV:</b> M	<b>DRAWN BY:</b> CNG