

For wood, concrete and steel attachments see Roof Anchorage Detail, Form No. CB-25A.

Will conform to wind load code requirements for knock-down or pre-assembled application. (Contact factory for assembled version.)



CALCULATED WIND ROOF CURBS FOR YORK UNITS SERIES 20/ LARGE SUNLINE- LONG RAIL

ZJ/ZR 180-300: ZF 210-300: XP 180-240



ProVent P/N	A	WEIGHT
80-265-1814	14"	332 Lbs
80-265-1818	18"	441 Lbs

Meets wind requirements for the following codes:
FBC 2017
based on ASCE 7-10.


Wind:
185 mph exposure D category III or IV building, max BLDG height: 60 ft
Kzt=1.66max

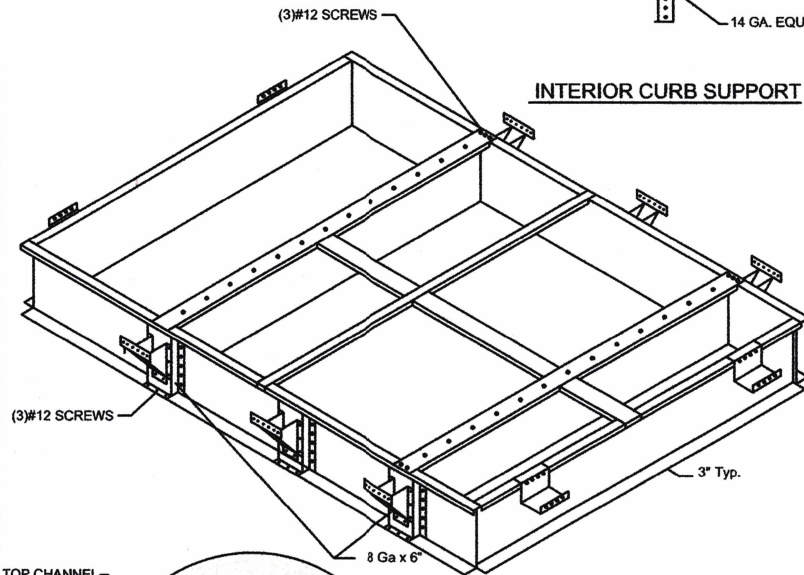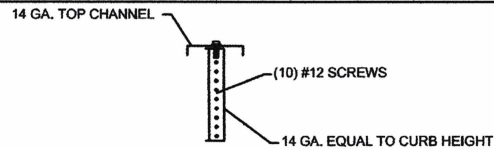


INTERIOR CURB SUPPORT

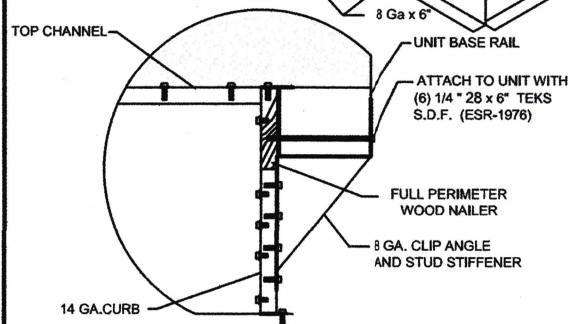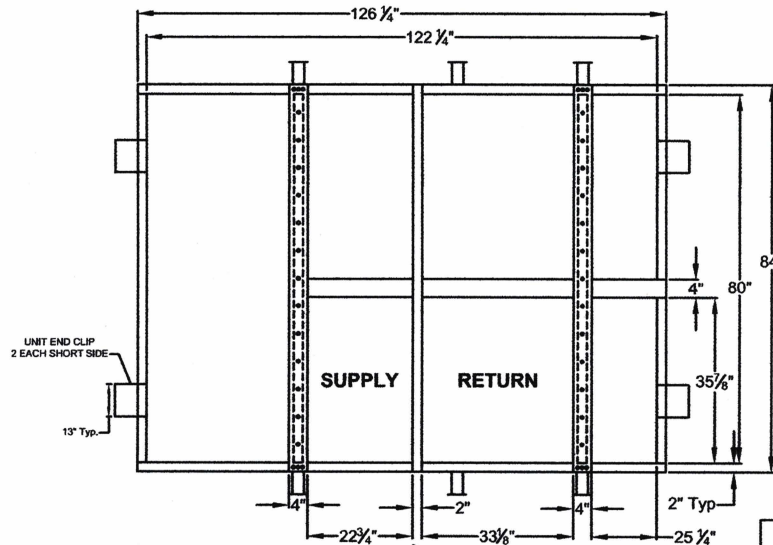


HOLD DOWN DETAIL

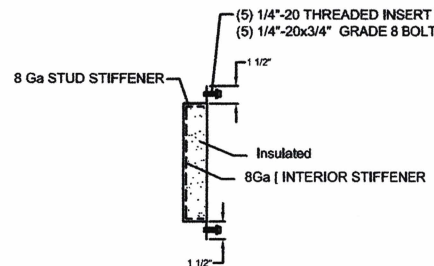

STUD STIFFENER

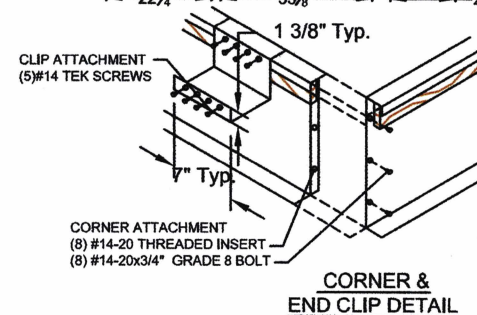

CORNER & END CLIP DETAIL

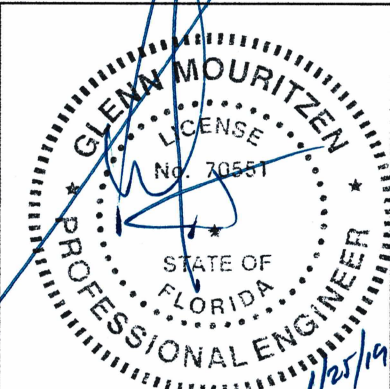

RRS ROOFTOP SYSTEMS

1625 DIPLOMAT DRIVE
CARROLTON, TX 75006

PHONE (972) 247-7447
FAX (972) 243-0940

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
CBKD-91A

DATE:
01/07/19

REV:
-

PART NUMBER:
80-265-18

DRAWN BY:
FMM