


## SPE CIFICATION DATA FOR ALLIED INDUSTRIES LG H/LCH 156H- 240H/ 300S



- 1. Shipped completely assembled and factory tested.
- 2. All wiring from control box to unit is field supplied.
- 3. Electromagnetically powder painted to match the unit.
- 4. Motors are wired and factory tested.
- 5. There are two 12 x 12 blowers with two 1  $\frac{1}{2}$  HP motors.
- 6. Power exhaust maybe mounted on unit or duct mounted depending on application.
- 7. Additional support maybe required. (Responsibility of installer.)
- 8. Not to be used with 8" roof curb.
- 9. No more than 4" roof deck if using a 14" roof curb.

	VOL <b>T</b>	<b>P</b> HASE	MOTOR			UNIT						
PROVENT MODEL#			QTY	HP	RPM	CIR. QTY	FLA	MCA	FUSE SIZE	@ 0.1		BLOWER
										CFM	RPM	SIZE
PEDCCBX25M	230	2.	2	1 ½	1725	1	10.2	.2 11.5	15	8000	665	(2) 12 x 12 BELT
DEDOCRYACIA	460	3+										
PEDCCBX46M	400						5.0	5.6	8			

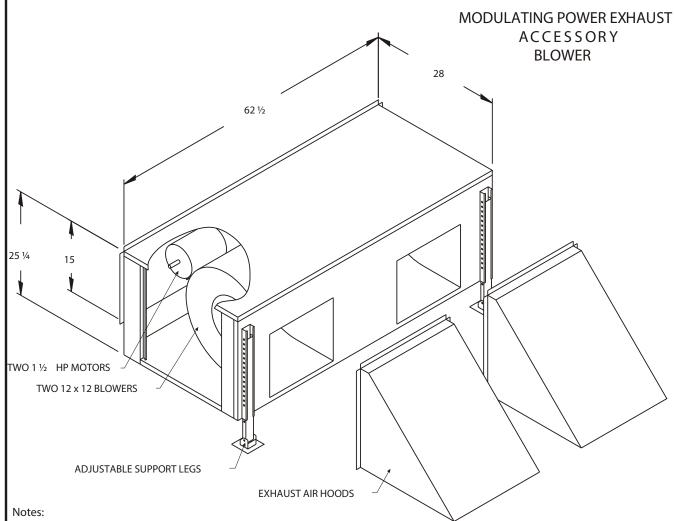