FEATURES

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable dry bulb sensor with changeover temperature of ±1° lag. (No low temperature reset for economizer use.)
- · Stainless steel damper side seals.
- AMCA certified CD-60 Airfoil O/A dampers blades.
- Meets leakage rate as required by ASHRAE 90.1.
- CD-60 Airfoil R/A damper blades.
- · External linkage system.
- Mechanically secured upgraded outside air intake filter.
- Down or horizontal discharge application.
- "LEED" economizer option.

CONVERTIBLE ECONOMIZER WITH AIRFOIL DAMPER BLADES AND BAROMETRIC RELIEF FOR ALLIED UNITS

LGH/LCH 242-360H

PROVENT P/N Wt.

ECODDBXDB
(Fully Modulating Dry Bulb)

ECODDBXEN
(Fully Modulating Enthalpy)


PART NUMBER:


ECODDBX Series

DRAWN BY:

CNG

REV:

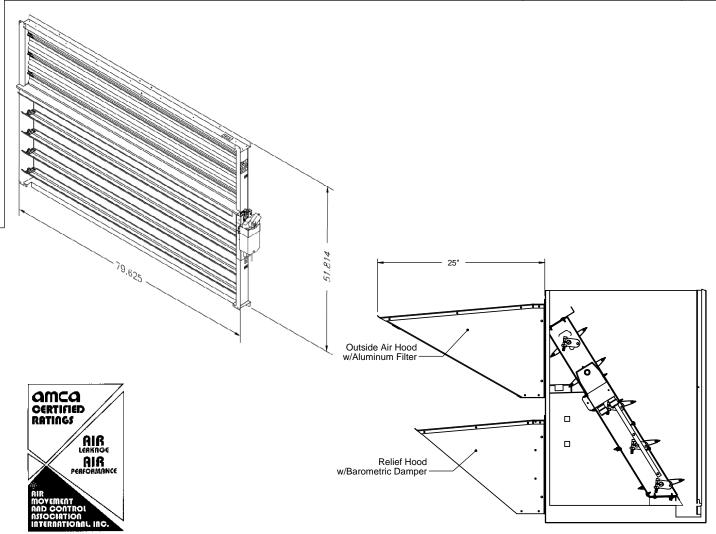





3847 WABASH DR. MIRA LOMA, CA 91725

PHONE (951) 685-1101 FAX (619) 872-9799

SUBMITTED TO:	FURINI NU:	
COMPANY:	-	
JOB NAME:	DATE:	
EQUIPMENT:	7/3/2014	
NOTES:	170/2014	