
FEATURES

- CA Title 24 Compliant.
- · Direct coupled style actuator standard.
- · Stainless steel damper side seals.
- AMCA certified CD-60 Airfoil dampers blades.
- Meets leakage rate as required by ASHRAE 90.1.
- · External linkage system.
- · Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Relief hood provided for horizontal duct mount.
- Metal Filter 19" x 16-1/16" x 7/8" (exact) included


FEATURES (When Ordered With Control Options)

- Controls are FDD Compliant
- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- Requires part number 6210-0010J for Dual Enthalpy.
- CO2 controller standard. Wall or duct mounted CO2 sensor provided as option: CO2WM - Wall Mount CO2DM - Duct Mount
- ProVent P/N: FLOWECAFF1860
- Outside air measurement for dilution utilizing thermal dispersion technology and ASHRAE 62.1 compliant. Provides LEED credit by supplying feedback on ventilition system performance ensuring that the ventilation system maintains design requirements.
- Factory installed onto economizer standard.
- Provides analog outputs for BMS, visual or audible alert, and generates an alarm when conditions vary by 10% or more of set point.



HORIZONTAL ECONOMIZER WITH BAROMETERIC RELIEF **FOR YORK UNITS**

DNQ/DNY/DNZ/DEQ/DEZ/BHQ/BHX/BHZ 024-060

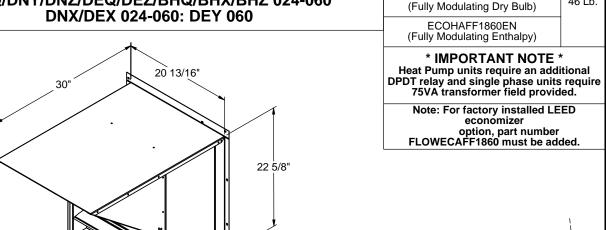

Access Panel

ProVent P/N

ECOHAFF1860AC

(Actuator Only, 2-10 VDC)

ECOHAFF1860DB


Wt.

46 l b.

DRAWN BY:



18 1/2"

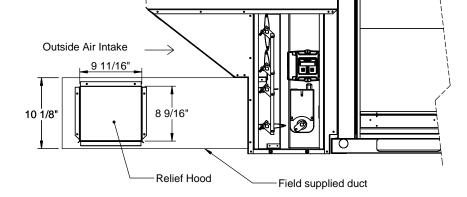

EODM NO:

30"



3847 WABASH DRIVE MIRA LOMA, CA 91725

PHONE (951) 685-1101 FAX (619) 872-9799

SUBMITED TO:	FORM NO:	PART NUMBER:	
COMPANY:	ECO-214	ECOHAFF1860 Series	
JOB NAME:	DATE:	REV:	DRAWN B
EQUIPMENT:	2/29/2016	7	CNG
NOTES:	2/20/2010	•	5.10