



- Roof curb sides and ends are 16 ga. galvanized steel.
- Perimeter upper frame supplied with pre-punch assembly holes.
- Assembly hardware provided for field assembly.
- Gasketing package provided.
- Heat treated wood nailer provided.

- Ductwork must be 3/4" smaller than duct openings shown.
- Adjust up to 1" in 12" pitch in either direction.
- Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.

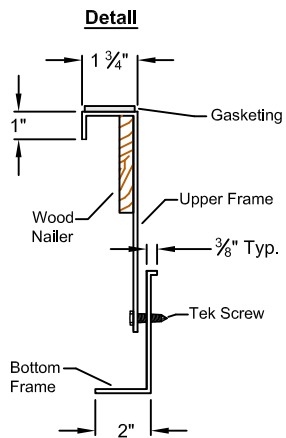

ZGA, ZCA, ZHA 036-060

ProVent P/N	A	B	WEIGHT
CBAKDABZ08	8"	12"	104 Lbs
CBAKDABZ11	11"	15"	122 Lbs
CBAKDABZ14	14"	18"	145 Lbs

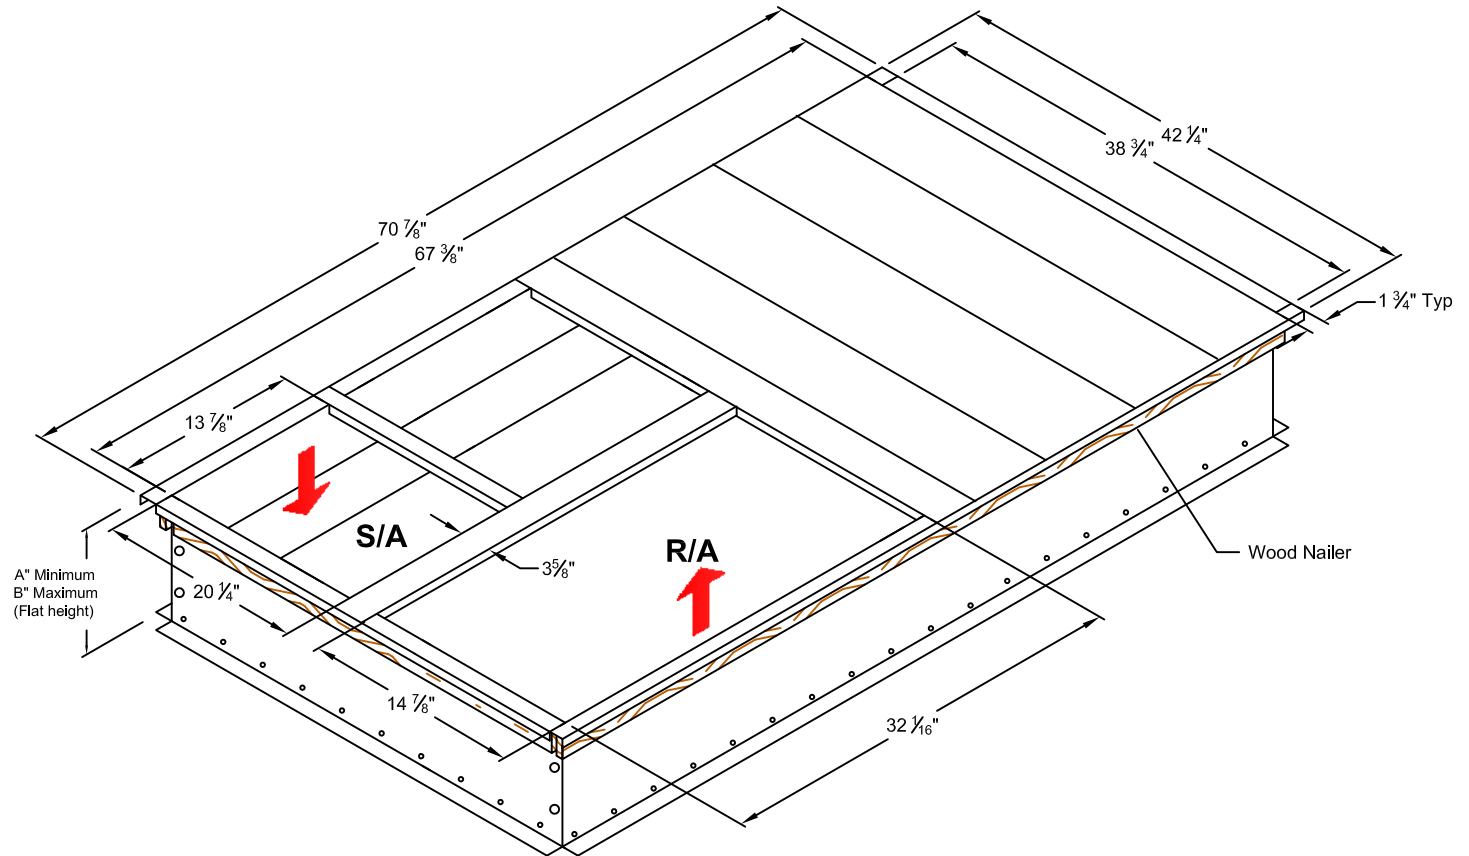

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

DRAWN BY: CNG	
-------------------------	--