
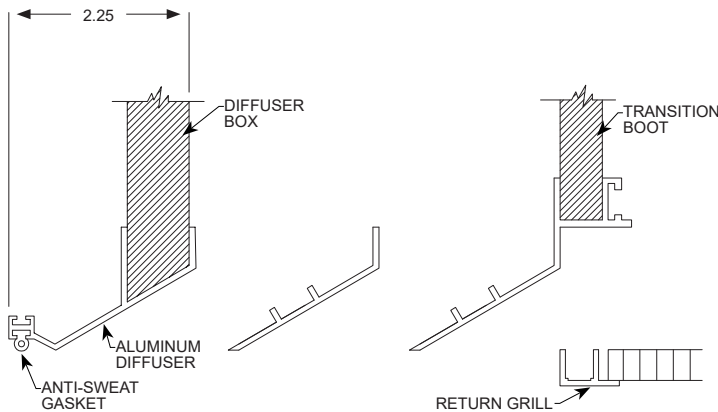


Application

Ruskin Rooftop Systems 510 series concentric diffuser systems are designed to provide a single point air distribution system with the added benefit of having directional air control. The systems may be used with either a "T-Bar" ceiling or a plaster ceiling.

Features

- Even 4-way air distribution
- All anodized aluminum diffuser frame
- Aluminum return air egg crate
- Double deflection diffuser
- Built-in Anti-Sweat gasket
- Sheet metal transition
- Built-in hanging supports
- Sheet metal diffuser box
- Stainless steel thumb screws
- Fully insulated (both supply and return)

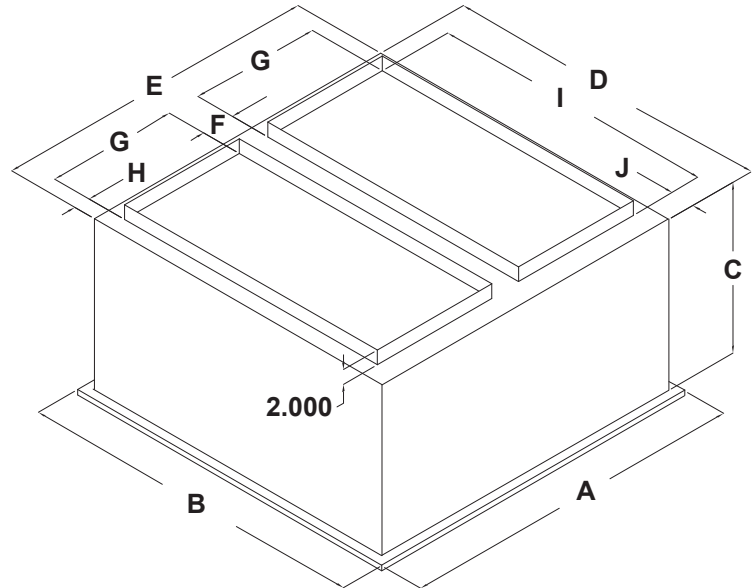

Recommended Specification

Diffusers shall consist of an aluminum supply diffuser with an aluminum egg-crate return. Unit shall be complete with a permanent non-adhesive anti-sweat gasket and hanging supports. Diffusers five ton and smaller shall have a molded fiberglass interior transition. Units fifteen ton and larger shall have supply duct through return transition ensure equal airflow to all four sides of diffuser. Manufacturers published data sheet shall include CFM rating, velocity rating, noise, static, and throw information. Flush mount concentric diffusers shall be in all respects equivalent to Ruskin Rooftop Systems Model 510 Series.

DIMENSIONAL DATA

RRS MODEL#	A	B	C	D	E	F	G	H	I	J	DUCT SIZE
01-510-60B	47.625	47.625	29.250	45	45	4.500	18	2.250	36	4.500	18 x 36

ENGINEERING DATA

RRS MODEL#	CFM	STATIC PRESSURE	THROW FEET	NECK VEL.	JET VEL.	NOISE LEVEL	WEIGHT	GRILL COLOR	FILTER	BOX TYPE
01-510-60B	5600	0.36	28-37	1000	2082	45 db	158 lbs	ALUMINUM - GRAY	NOT INCLUDED	SHEET METAL
	6000	0.42	40-50	1071	2230					
	6400	0.50	43-52	1143	2379	50 db				
	6600	0.54	45-56	1179	2454					

JANUARY 4, 2021 FORM# RRS_51060

SUPERSEDES: 07-07-17