

**FEATURES**

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- **AMCA certified CD-50 High Performance Airfoil dampers blades.**
- **Meets leakage rate as required by ASHRAE 90.1.**
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Metal Filter 19" x 19-9/16" x 7/8" (exact) included (Qty-3)

**FEATURES (When Ordered With Control Options)**

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Requires additional Enthalpy sensor for Dual Enthalpy.
- Selectable economizer changeover temperature set point.
- CO2 controller standard.

Wall or duct mounted CO2 sensor provided as option:

- CO2WM - Wall Mount
- CO2DM - Duct Mount

**HORIZONTAL DISCHARGE ECONOMIZER FOR SUN CHOICE UNITS**

**AH20-25**

PROVENT P/N


ESTIMATED Wt.

ECOHSAV2528DBS  
(SSE Controller Dry Bulb)

320 Lbs.

ECOHSAV2528ENS  
(SSE Controller Enthalpy)

320 Lbs.

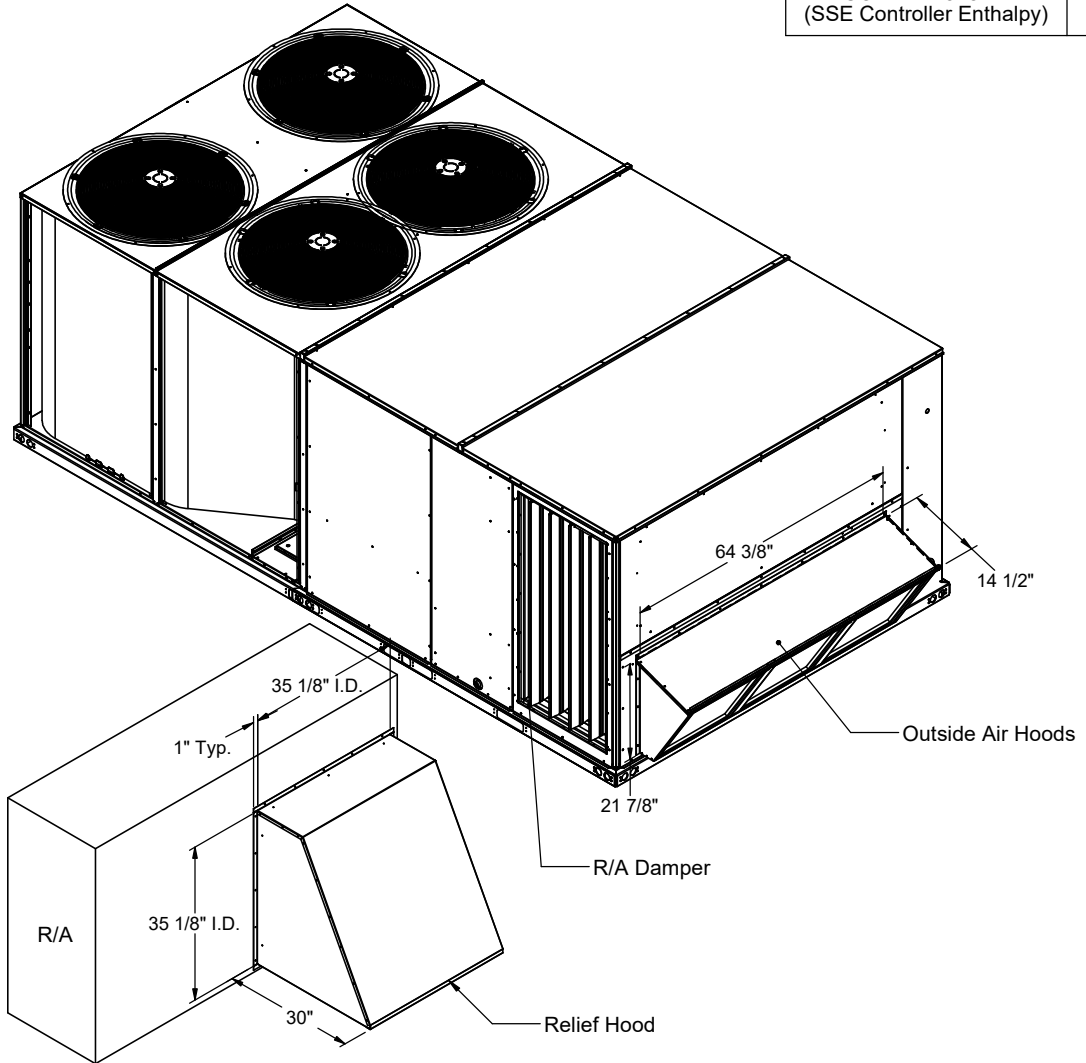

Only Ruskin Company Model CD-50 is AMCA Certified



3847 WABASH DR.  
MIRA LOMA, CA 91725

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

FORM NO:  
ECO-77

DATE:  
2/13/2024

PART NUMBER:  
ECOHSAV2528 Series

REV:  
-

DRAWN BY:  
FMM