

FEATURES

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- **AMCA certified CD-50 High Performance Airfoil dampers blades.**
- **Meets leakage rate as required by ASHRAE 90.1.**
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Metal Filter 19" x 19-9/16" x 7/8" (exact) included (Qty-3)

FEATURES (When Ordered With Control Options)

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Requires additional Enthalpy sensor for Dual Enthalpy.
- Selectable economizer changeover temperature set point.
- CO2 controller standard.

Wall or duct mounted CO2 sensor provided as option:


- CO2WM - Wall Mount
- CO2DM - Duct Mount



Ruskin Company Model CD-50 is AMCA Certified

HORIZONTAL DISCHARGE ECONOMIZER FOR SUN CHOICE UNITS

AH, KH 20-25

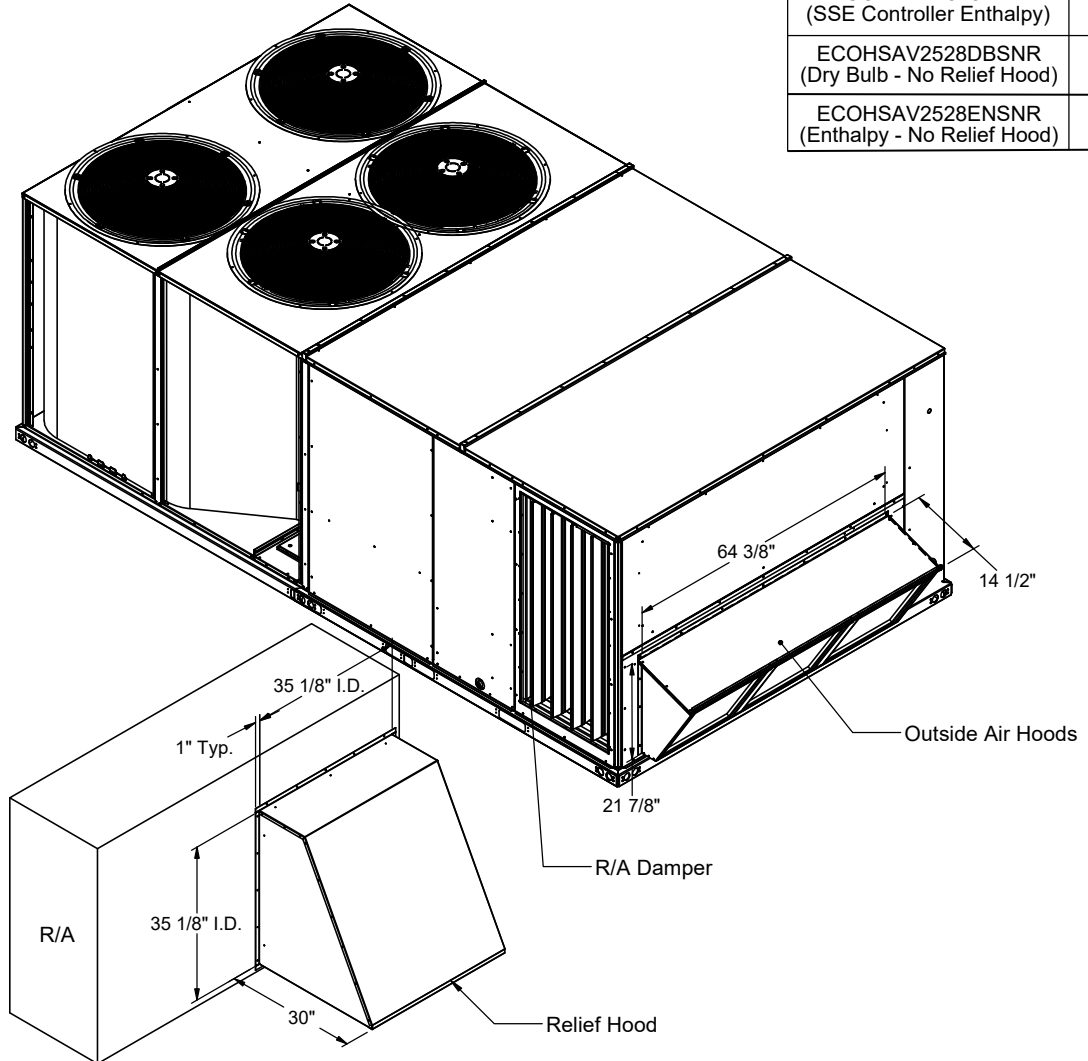

PROVENT P/N

ESTIMATED
Wt.

ECOHSV2528DBS
(SSE Controller Dry Bulb)

320 Lbs.

ECOHSV2528ENS
(SSE Controller Enthalpy)

320 Lbs.

ECOHSV2528DBSNR
(Dry Bulb - No Relief Hood)

225 Lbs.

ECOHSV2528ENSNR
(Enthalpy - No Relief Hood)

225 Lbs.



3847 WABASH DR.
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:

ECO-77

PART NUMBER:

ECOHSV2528 Series

DATE:

7/2/2024

REV:

M2

DRAWN BY:

CNG