

FEATURES

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- **AMCA certified CD-50 High Performance Airfoil dampers blades.**
- **Meets leakage rate as required by ASHRAE 90.1.**
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Metal Filter 19" x 19-9/16" x 7/8" (exact) included (Qty-3)

FEATURES (When Ordered With Control Options)

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Requires additional Enthalpy sensor for Dual Enthalpy.
- Selectable economizer changeover temperature set point.
- CO2 controller standard.

Wall or duct mounted CO2 sensor provided as option:

- CO2WM - Wall Mount
- CO2DM - Duct Mount

HORIZONTAL ECONOMIZER FOR YORK CHOICE UNITS:

AH, KH15-18

PROVENT P/N

ESTIMATED
Wt.

ECOHSAV1520DBS
(SSE Controller Dry Bulb)

280 Lbs.

ECOHSAV1520ENS
(SSE Controller Enthalpy)


280 Lbs.

ECOHSAV1520DBSNR
(Dry Bulb - No Relief Hood)

190 Lbs.

ECOHSAV1520ENSNR
(Enthalpy - No Relief Hood)

190 Lbs.

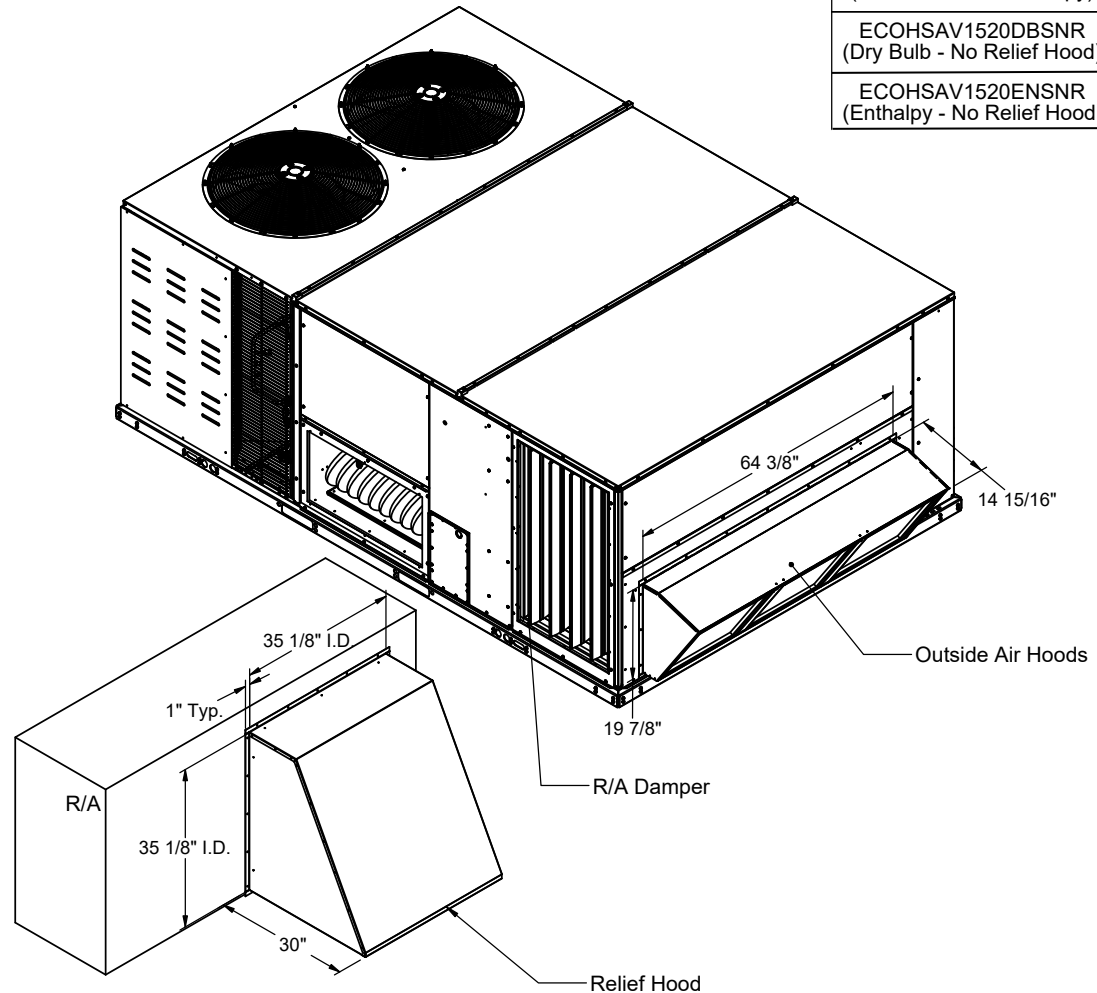

Only Ruskin Company Model CD-50 is AMCA Certified



3847 WABASH DR.
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:

ECO-80

DATE:

7/2/2025

PART NUMBER:

ECOHSAV1520 Series

REV:

M2

DRAWN BY:

CNG