FEATURES

- · Direct coupled style actuator standard.
- CA Title 24 Compliant
- · Stainless steel damper side seals.
- AMCA certified CD-60 Airfoil dampers blades.
- Meets leakage rate as required by ASHRAE 90.1.
- · External linkage system.
- · Mechanically secured outside air intake filter.
- · Capable of introducing up to 100% outdoor air.
- 16" X 14" X 7/8" (EXACT) Metal Filter included.


FEATURES (When Ordered With Control Options)

- Controls are FDD Compliant
- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- Requires part number 6210-0046 for Dual Enthalpy.
- Logic module includes DCV for CO2 applications.
 Wall or duct mounted CO2 sensor provided as option: CO2WM - Wall Mount

CO2WM - Wall Mount CO2DM - Duct Mount

LEED ECONOMIZER OPTION

- ProVent P/N: FLOWECLXS
- Outside air measurement for dilution utilizing thermal dispersion technology and ASHRAE 62.1 compliant. Provides LEED credit by supplying feedback on ventilition system performance ensuring that the ventilation system maintains design requirements.
- · Factory installed onto economizer standard.
- Provides analog outputs for BMS, visual or audible alert, and generates an alarm when conditions vary by 10% or more of set point.




VERTICAL ECONOMIZER FOR YORK UNITS

PG3E, PC3E, PCG4A, PCE4A 24-42 PCG6A, PCE6A, PHE4/6A, PHG4/6A 24-30 ProVent P/N Wt.

ECODLXSAC
(Actuator Only, 2-10 VDC)

ECODLXSDB
(Fully Modulating Dry Bulb)

ECODLXSEN
(Fully Modulating Enthalpy)

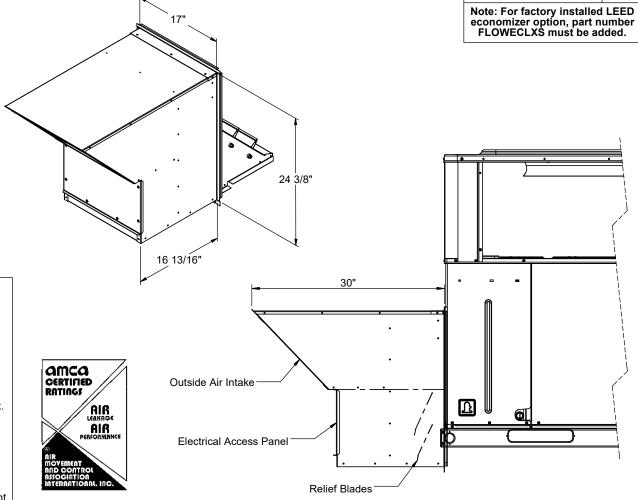



3847 WABASH DRIVE MIRA LOMA, CA 91752

PHONE (951) 685-1101 FAX (619) 872-9799

| SUBMITED TO: | FORM NO: | PART NUMBER: | |
|--------------|--------------------|----------------|------------------|
| COMPANY: | ECO-500 | ECODLXS Series | |
| JOB NAME: | | | |
| EQUIPMENT: | DATE: 2/10/2025 | REV: | DRAWN BY: CNG |
| NOTES: | 2/10/2023 | ' | CNG |

