

FEATURES

- Stainless steel low leak damper side seals.
- External linkage system.
- Mechanically secured upgraded outside air intake filter.
- O/A Damper regulator (Set in field).
- Horizontal or down discharge (mounts in same position on unit).

0-100% MANUAL OSA HOOD PACKAGE FOR YORK UNITS:



**DM/DR/DCE/DCG/BP 036-072:
ZJ/XP/DY/DJ/DH/DHE/DHG/BQ/BCH 036-060: DF 072**

PROVENT P/N

OAMANSUN3672100

Wt.

29 Lb.

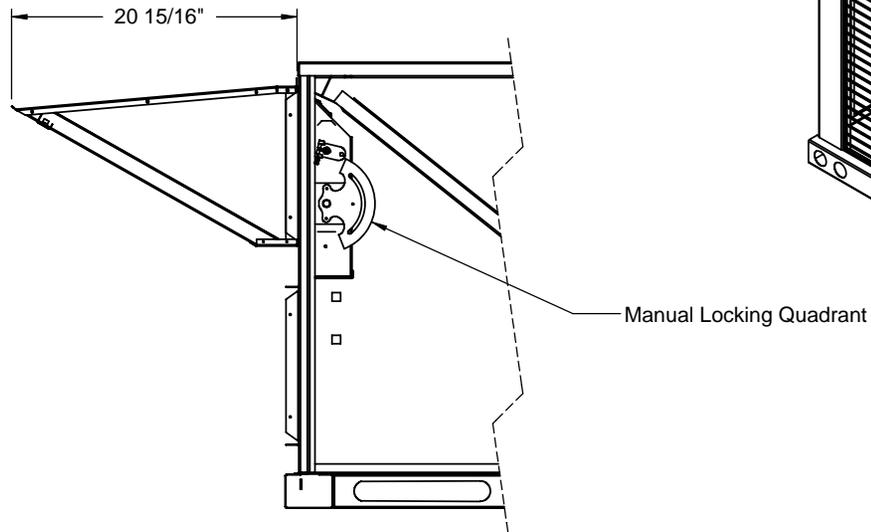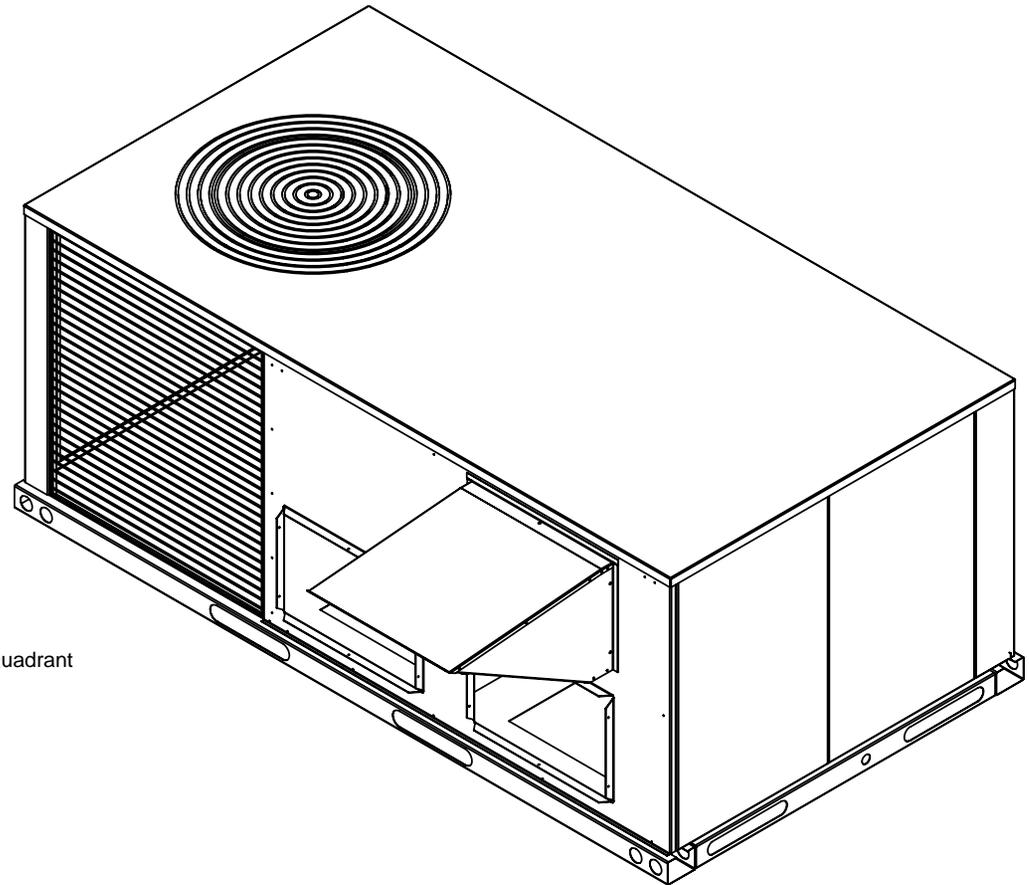

1392 EAST PALOMAR STREET
SUITE 403-234
CHULA VISTA, CA 91913

PHONE (619) 498-9246
FAX (619) 872-9799

SUBMITTED TO: _____

COMPANY: _____

JOB NAME: _____

EQUIPMENT: _____

NOTES: _____

FORM NO:

OA-16

DATE:
2/15/2010

REV:
1

DRAWN BY:
FMM