

FEATURES

- Painted hood and panels match factory specifications and color.
- 2-position option includes a built in damper position stop.
- CO2 capable option includes logic module with DCV.
- 2-10vdc Actuator standard.
- Ruskin CD60 low leak damper.
- External linkage system.
- Mechanically secured upgraded outside air intake filter. (26-3/8" x 25-1/2" x 7/8")
- Horizontal or down discharge. (Mounts in same position on unit).

0-100% OUTSIDE AIR 2-POSITION AND CO2 CAPABLE HOOD FOR YORK UNITS

ZT, ZH, ZJ, ZR, KT, KJ 037-150
ZF, XP, ZB, WP, KB 078-150

PROVENT P/N

OA2POPRD3715100BLS

OA2POPRD3715100VCO2S

DESCRIPTION

2-POSITION

CO2 CAPABLE

Weight




60 Lbs

LEED O/A DAMPER OPTION

- ProVent P/N: FLOWECPRD3715
- Outside air measurement for dilution utilizing thermal dispersion technology and ASHRAE G2.1 2007 compliant. Provides LEED credit by supplying feedback on ventilation system performance ensuring that the ventilation system maintains design requirements.
- Factory installed onto economizer standard.
- Provides analog outputs for BMS, visual or audible alert, and generates an alarm when conditions vary by 10% or more of set point.

O/A Damper

Thermal Dispersion
Airflow Measurement
System

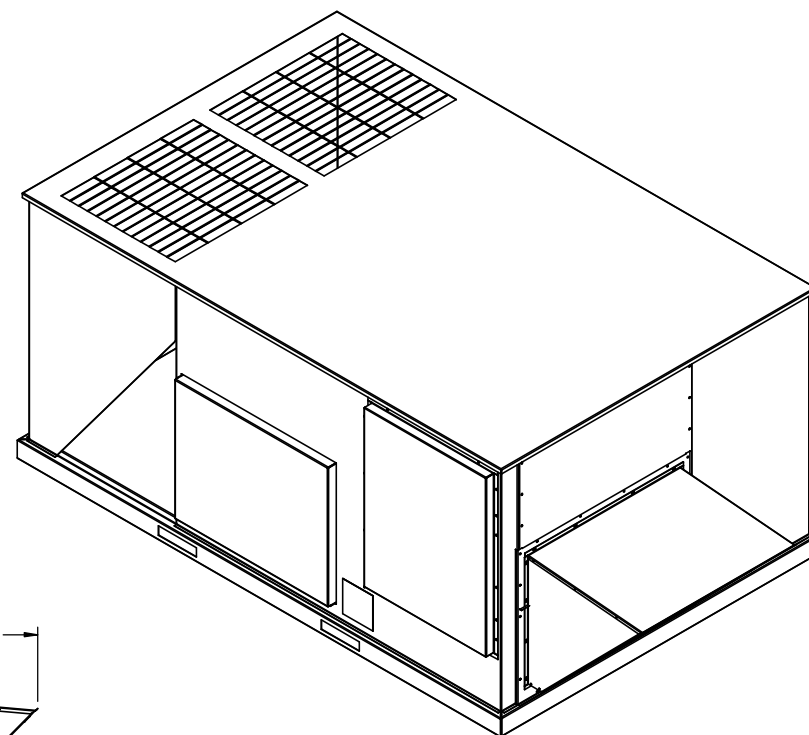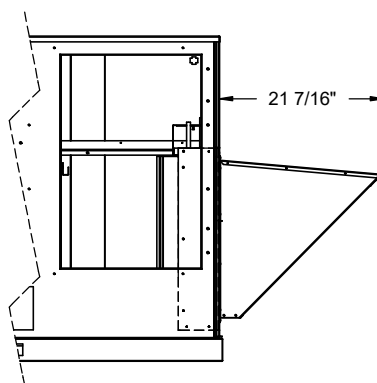

3847 WABASH DR.
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____

COMPANY: _____

JOB NAME: _____

EQUIPMENT: _____

NOTES: _____

FORM NO:

OA-45

DATE:

1/31/2025

PART NUMBER:

OA2POPRD SERIES

REV:

2

DRAWN BY:

CNG