

FEATURES:

- Painted hood and panel match factory color.
- Designed for unit mounted down discharge and duct mounted horizontal discharge.
- Includes gravity backdraft damper with fixed position option.
- Insulated panel.
- Includes (9-1/2" X 9-1/4" X 7/8") water entrainment filter.

0-35% OUTSIDE AIR PACKAGE FOR YORK UNITS



PCG4B, PCE4B 024-042 / PHE4B, PHG4B 024-030

ProVent P/N


WEIGHT

OALXS35FBC

7 Lbs.

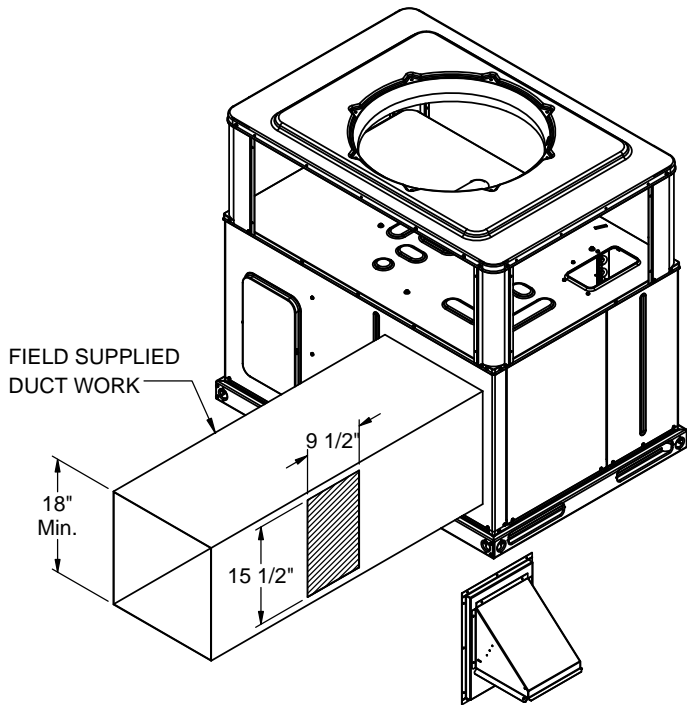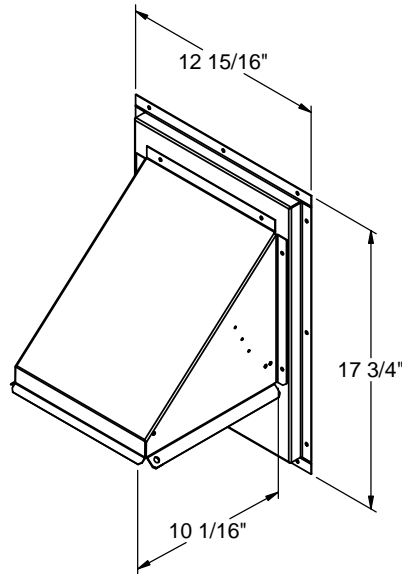

HORIZONTAL APPLICATION

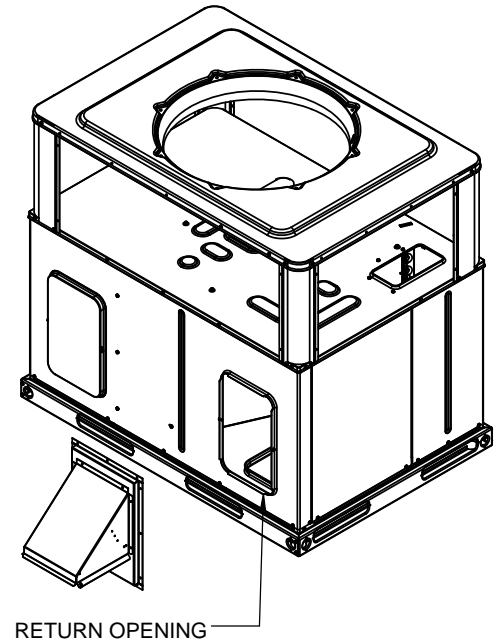

DOWN DISCHARGE APPLICATION



3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:

OA-37

DATE:
9/11/2015

REV:
-

DRAWN BY:
CNG