


FEATURES

- Prepaint hood and panels matching factory specifications and color.
- Designed for unit mounted down or horizontal discharge. (End horizontal return requires duct mounted.)
- Includes screen assembly.
- Available in fixed position or gravity backdraft.
- Insulated panel.
- Upper unit panel stays with unit for all tonage.

0-25% OUTSIDE AIR HOOD FOR YORK UNITS

ZT, ZH, ZJ, ZR, KT, KJ 037-150
ZF, XP, ZB, WP, KB 078-150

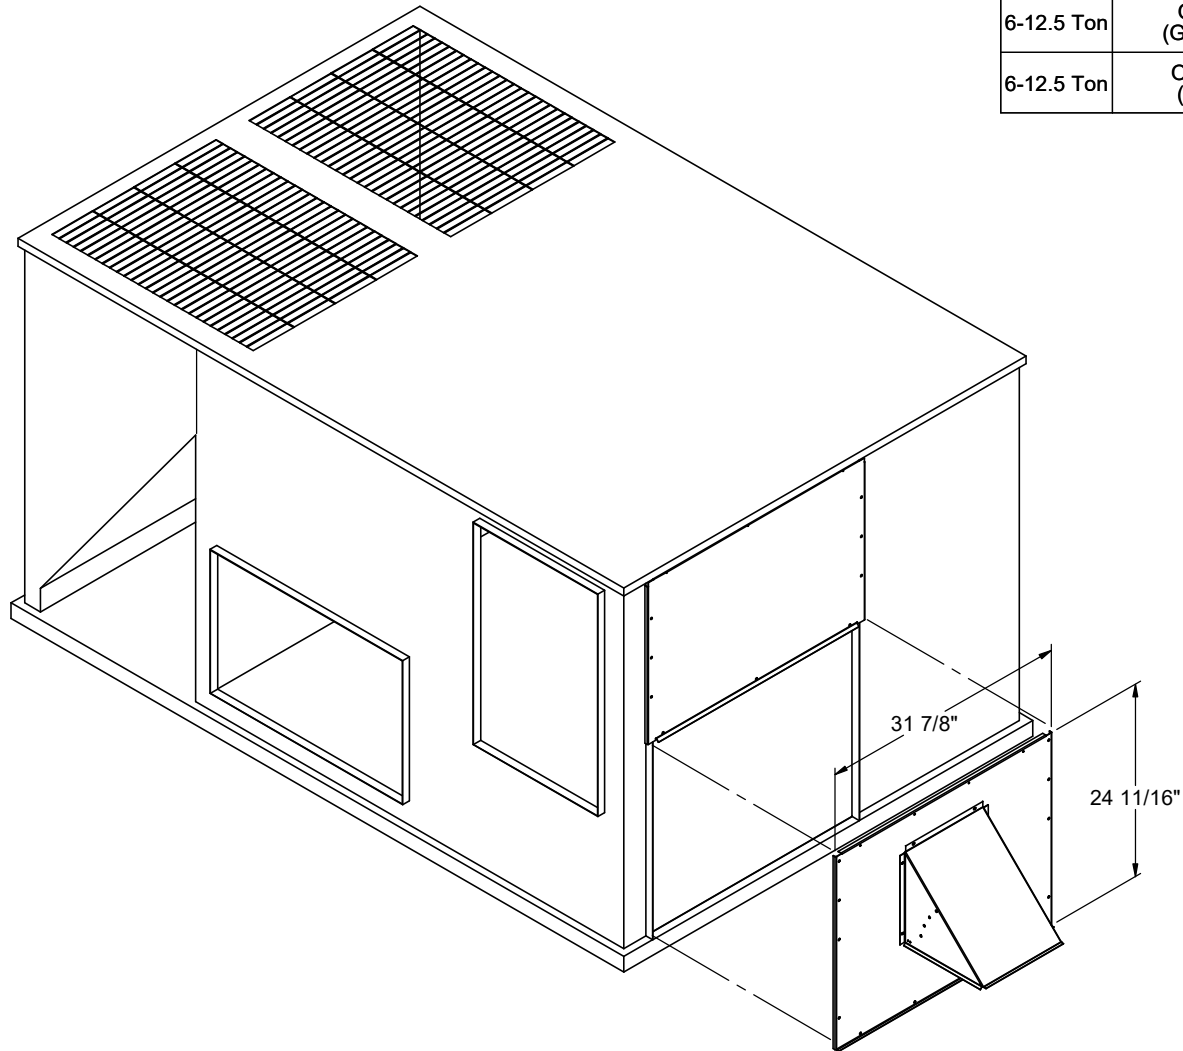

RTU	ProVent P/N	Weight
3-5 Ton	OAPRD376125 (Gravity Backdraft)	27 Lbs.
3-5 Ton	OAPRD3715F25 (Fixed Position)	27 Lbs.
6-12.5 Ton	OAPRD781525 (Gravity Backdraft)	27 Lbs.
6-12.5 Ton	OAPRD7815F25 (Fixed Position)	27 Lbs.



3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:

OA-103

DATE:
1/16/25

REV:
1

DRAWN BY:
CNG