

## FEATURES

- Access for motor, blower, and blower drives.
- Adjustable motor sheave.
- Motor with automatic internal thermal protection.
- Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.
- Constant Volume option includes a contactor to controls on/off operation by communicating with the economizer logic.

## HORIZONTAL DISCHARGE CENTRIFUGAL POWER EXHAUST FOR SSE YORK UNITS

**ZT, ZR, ZH, ZJ, KT, KJ 037, 049, 061**

VOLTAGE	External Static (in. W.G)				FLA	Hp	Wt
	0.1	0.2	0.3	0.4			
230V/3Ph	2,400 cfm	2,200 cfm	2,000 cfm	1,800 cfm	3.2	1	148 Lbs.
460V/3Ph					1.6		

### PLEASE NOTE:

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

## ProVent P/N

### CONSTANT VOLUME


**PEHCPRD376125CS**  
208/230V 3Ph

**PEHCPRD376146CS**  
460V 3Ph


### MODULATING

**PEHCPRD376125MS**  
208/230V 3Ph

**PEHCPRD376146MS**  
460V 3Ph

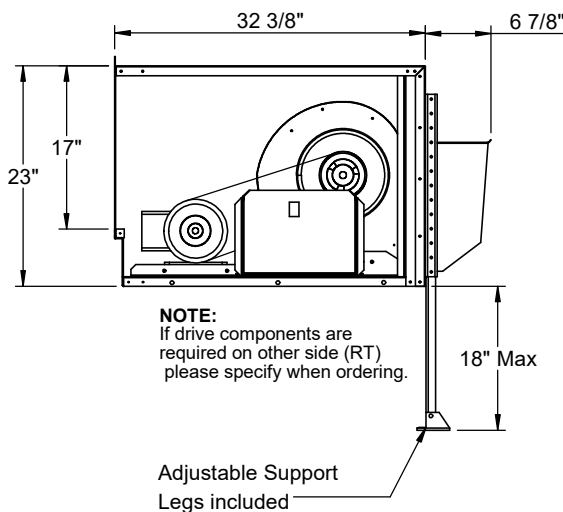

Mounting Section Included With Power Exhaust

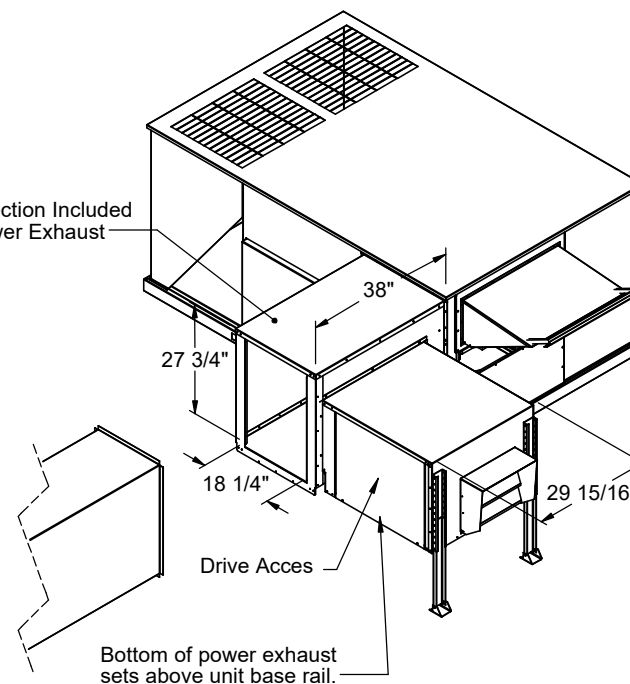

Ruskin Company Model CD-60 is AMCA Certified



3847 WABASH DR.  
MIRA LOMA, CA 91752

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

FORM NO:  
PE-126

DATE:  
5/2/2025

PART NUMBER:  
PEHCPRD3761S SERIES

REV:  
-

DRAWN BY:  
CNG