
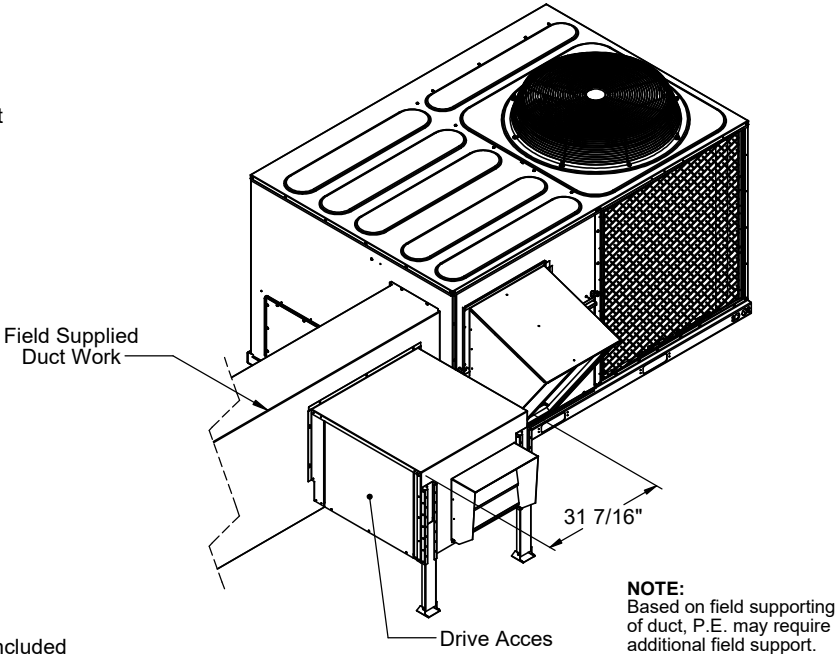


<div><div>FEATURES</div><div><ul style="list-style-type: none">• Access door for motor, blower, and blower drives.• Adjustable motor sheave.• Motor with automatic internal thermal protection.• Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.• Constant Volume option includes a contactor to control on/off operation by communicating with the economizer logic.</div></div>	HORIZONTAL DISCHARGE CENTRIFUGAL POWER EXHAUST FOR YORK CORE SMALL (SHORT) CABINET UNITS					ProVent P/N						
						CONSTANT VOLUME		MODULATING				
	ZX, KX 04-06; ZQ, KQ 04-05 ZY, XY, XQ, ZL, KY, WY, WQ, KL 04					PEHCPRSS06C 208/230V 1Ph		PEHCPRSSDB06M 208/230V 1Ph				
						PEHCPRSS25C 208/230V 3Ph		PEHCPRSSDB25M 208/230V 3Ph				
	VOLTAGE					External Static (in. W.G)				FLA	Hp	Wt
						0.10.20.30.4						
						230V/3Ph						
460V/3Ph												
208/230 1Ph-M					2,400 cfm2,200 cfm2,000 cfm1,800 cfm				5.54			
208/230 1Ph-C									7.25			
									1167 Lbs.			

PLEASE NOTE:

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

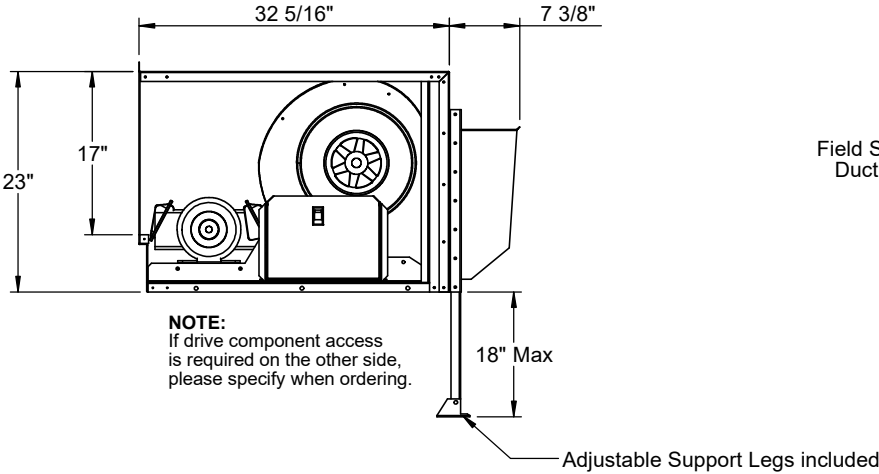

	3847 WABASH DRIVE MIRA LOMA, CA 91752 PHONE (951) 685-1101 FAX (619) 872-9799	SUBMITTED TO: _____ COMPANY: _____ JOB NAME: _____ EQUIPMENT: _____ NOTES: _____	FORM NO: PE-141	PART NUMBER: PEH CPRSS SERIES	
			DATE: 4/30/2025	REV: 1	DRAWN BY: CNG