

## FEATURES

- Access door for motor, blower, and blower drives.
- Adjustable motor sheave.
- Motor with automatic internal thermal protection.
- Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.
- Constant Volume option includes a contactor to control on/off operation by communicating with the economizer logic.

## HORIZONTAL DISCHARGE CENTRIFUGAL POWER EXHAUST FOR YORK CORE SMALL (TALL) CABINET UNITS

ZX, KX 07; ZQ, KQ 06; XX, WX, ZX, KX A7  
ZY, XY, XQ, ZL, KY, WY, WQ, KL 05-06

VOLTAGE	External Static (in. W.G)				FLA	Hp	Wt
	0.1	0.2	0.3	0.4			
230V/3Ph	2,400 cfm	2,200 cfm	2,000 cfm	1,800 cfm	3.2	1	167 Lbs.
460V/3Ph					1.6		
208/230 1Ph-M					5.54		
208/230 1Ph-C					7.25		

## ProVent P/N

### CONSTANT VOLUME

PEHCPRST06C  
208/230V 1Ph

PEHCPRST25C  
208/230V 3Ph

PEHCPRST46C  
460V 3Ph

### MODULATING



PEHCPRSTDB06M  
208/230V 1Ph

PEHCPRSTDB25M  
208/230V 3Ph

PEHCPRSTDB46M  
460V 3Ph

## PLEASE NOTE:

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

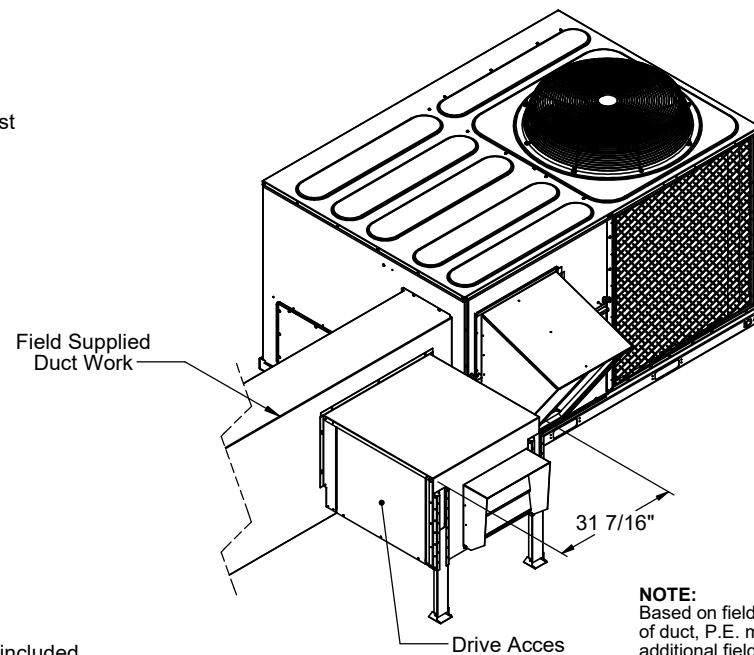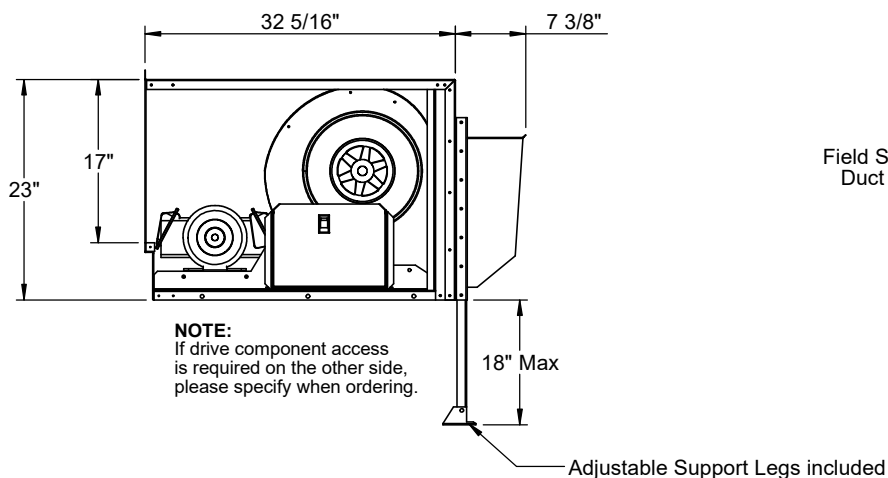

3847 WABASH DRIVE  
MIRA LOMA, CA 91752

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

FORM NO:  
PE-142

DATE:  
4/30/2025

PART NUMBER:  
PEHCPRST SERIES

REV:  
1

DRAWN BY:  
CNG