

FEATURES

- Access door for motor, blower, and blower drives.
- Adjustable motor sheave.
- Motor with automatic internal thermal protection.
- Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.
- Constant Volume option includes a contactor to control on/off operation by communicating with the economizer logic.



HORIZONTAL DISCHARGE CENTRIFUGAL POWER EXHAUST FOR YORK CORE LARGE (TALL) CABINET UNITS

**ZX, KX09-14; ZY, KY08-12, XY, WY08-09
XX, WX08-12; ZL, KL08-14**

VOLTAGE	External Static (in. W.G)				FLA	Hp	Wt
	0.1	0.2	0.3	0.4			
230V/3Ph	4,750 cfm	4,600 cfm	4,500 cfm	4,400 cfm	5.6	2	152 Lbs.
460V/3Ph					2.8		

PLEASE NOTE:

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

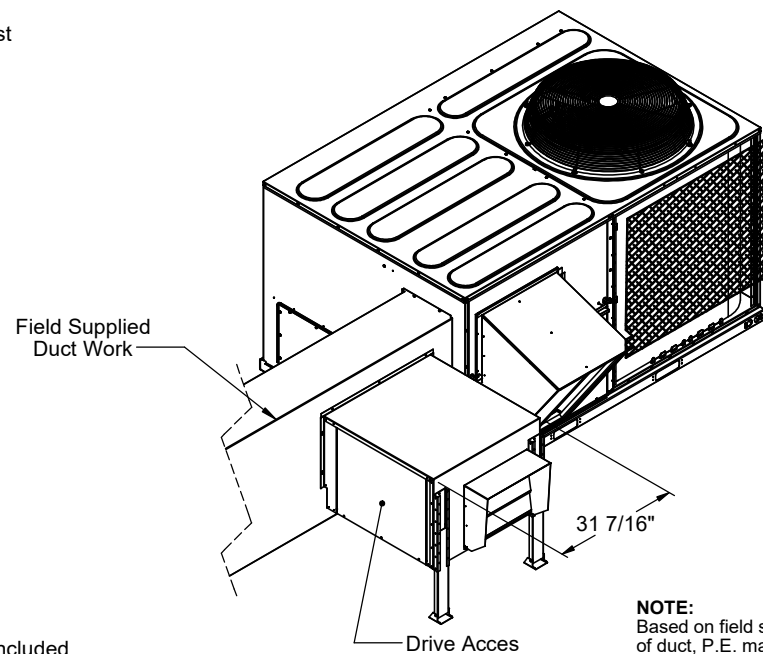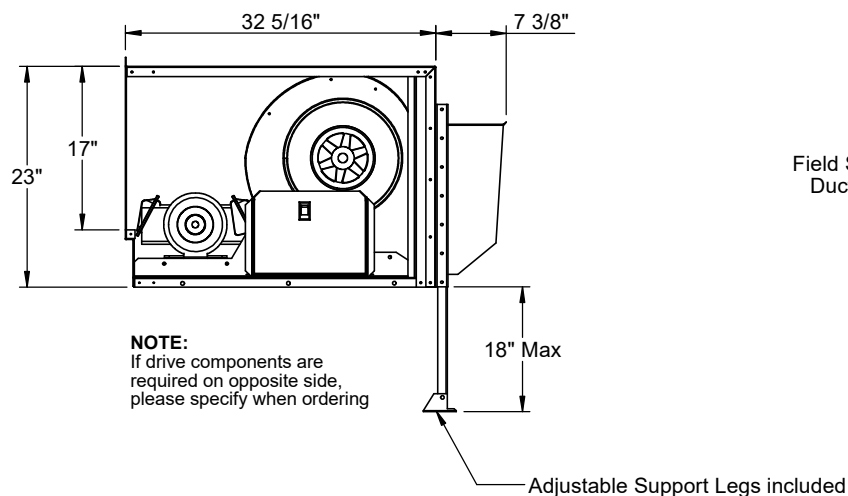

ProVent P/N

CONSTANT VOLUME

PEHCPRLT25C
208/230V 3Ph

PEHCPRLT46C
460V 3Ph

MODULATING

PEHCPRLT25M
208/230V 3Ph

PEHCPRLT46M
460V 3Ph



**3847 WABASH DR.
MIRA LOMA, CA 91752**

**PHONE (951) 685-1101
FAX (619) 872-9799**

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
PE-143

DATE:
4/30/2025

PART NUMBER:
PEHCPRLT SERIES

REV:
1

DRAWN BY:
CNG