

- FEATURES**
- Includes fully modulating economizer. (See Form ECO-90 for Economizer Specs).
 - CO2 controller standard on economizer. Space or duct mounted CO2 sensor provided as option:
 - CO2WM - Wall Mount With LED
 - CO2DM - Duct Mount
 - Access for motor, blower, and blower drives.
 - Adjustable motor sheave.
 - Motor with automatic internal thermal protection.
 - Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.



**DOWN DISCHARGE CENTRIFUGAL
POWER EXHAUST ECONOMIZER FOR YORK
PRESTIGE UNITS**

ZX04-07; ZY, XY, ZQ, XQ, ZL04-06; XX, ZXA7

VOLTAGE	External Static (in. W.G)				FLA	Hp	Est. Wt
	0.1	0.2	0.3	0.4			
230V/3Ph					3.2	1	198 Lbs. (Includes Economizer)
460V/3Ph					1.6		
208/230 1Ph-M	2,100 cfm	2,000 cfm	1,900 cfm	1,800 cfm	5.54		
208/230 1Ph-c					7.25		

ProVent P/N	
CONSTANT VOLUME	MODULATING
PEDCPRSDB06C 208/230V 1Ph Selectable Dry Bulb	PEDCPRSDB06M 208/230V 1Ph Selectable Dry Bulb
PEDCPRSEN06C 208/230V 1Ph Enthalpy	PEDCPRSEN06M 208/230V 1Ph Enthalpy
PEDCPRSDB25C 208/230V 3Ph Selectable Dry Bulb	PEDCPRSDB25M 208/230V 3Ph Selectable Dry Bulb
PEDCPRSEN25C 208/230V 3Ph Enthalpy	PEDCPRSEN25M 208/230V 3Ph Enthalpy
PEDCPRSDB46C 460V 3Ph Selectable Dry Bulb	PEDCPRSDB46M 460V 3Ph Selectable Dry Bulb
PEDCPRSEN46C 460V 3Ph Enthalpy	PEDCPRSEN46M 460V 3Ph Enthalpy

- PLEASE NOTE:**
- Return air duct, dampers, return air grills are specific for each unit.
 - For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

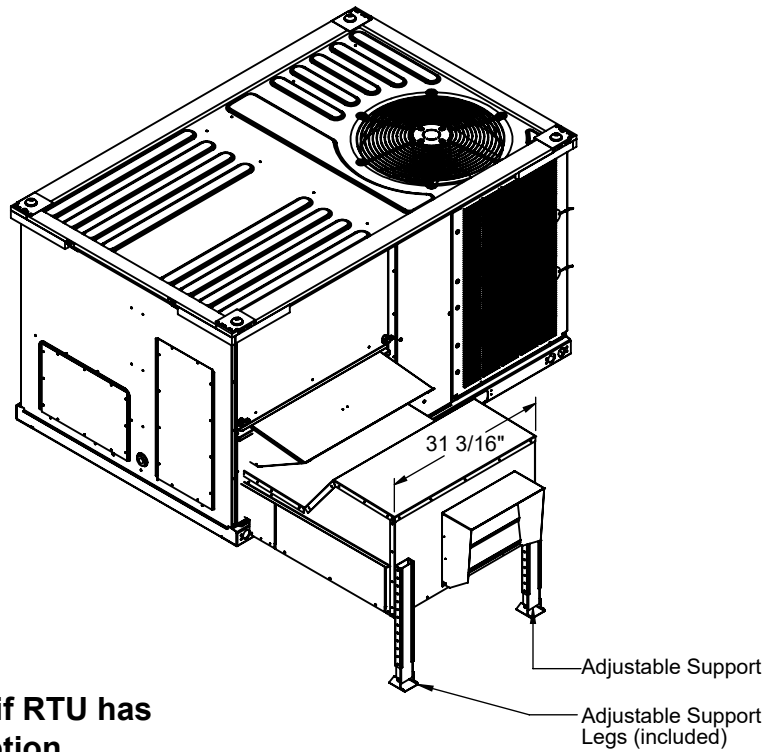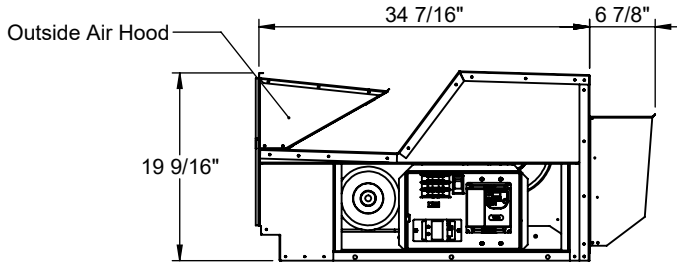

Note:
Please contact ProVent if RTU has a hinged filter access option.



Only Ruskin Company Model CD-60 is AMCA Certified



3847 WABASH DRIVE
MIRA LOMA, CA 91725
PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO: PE-56
DATE: 10/6/2022

PART NUMBER: PEDCPRS SERIES
REV: M
DRAWN BY: ALL